

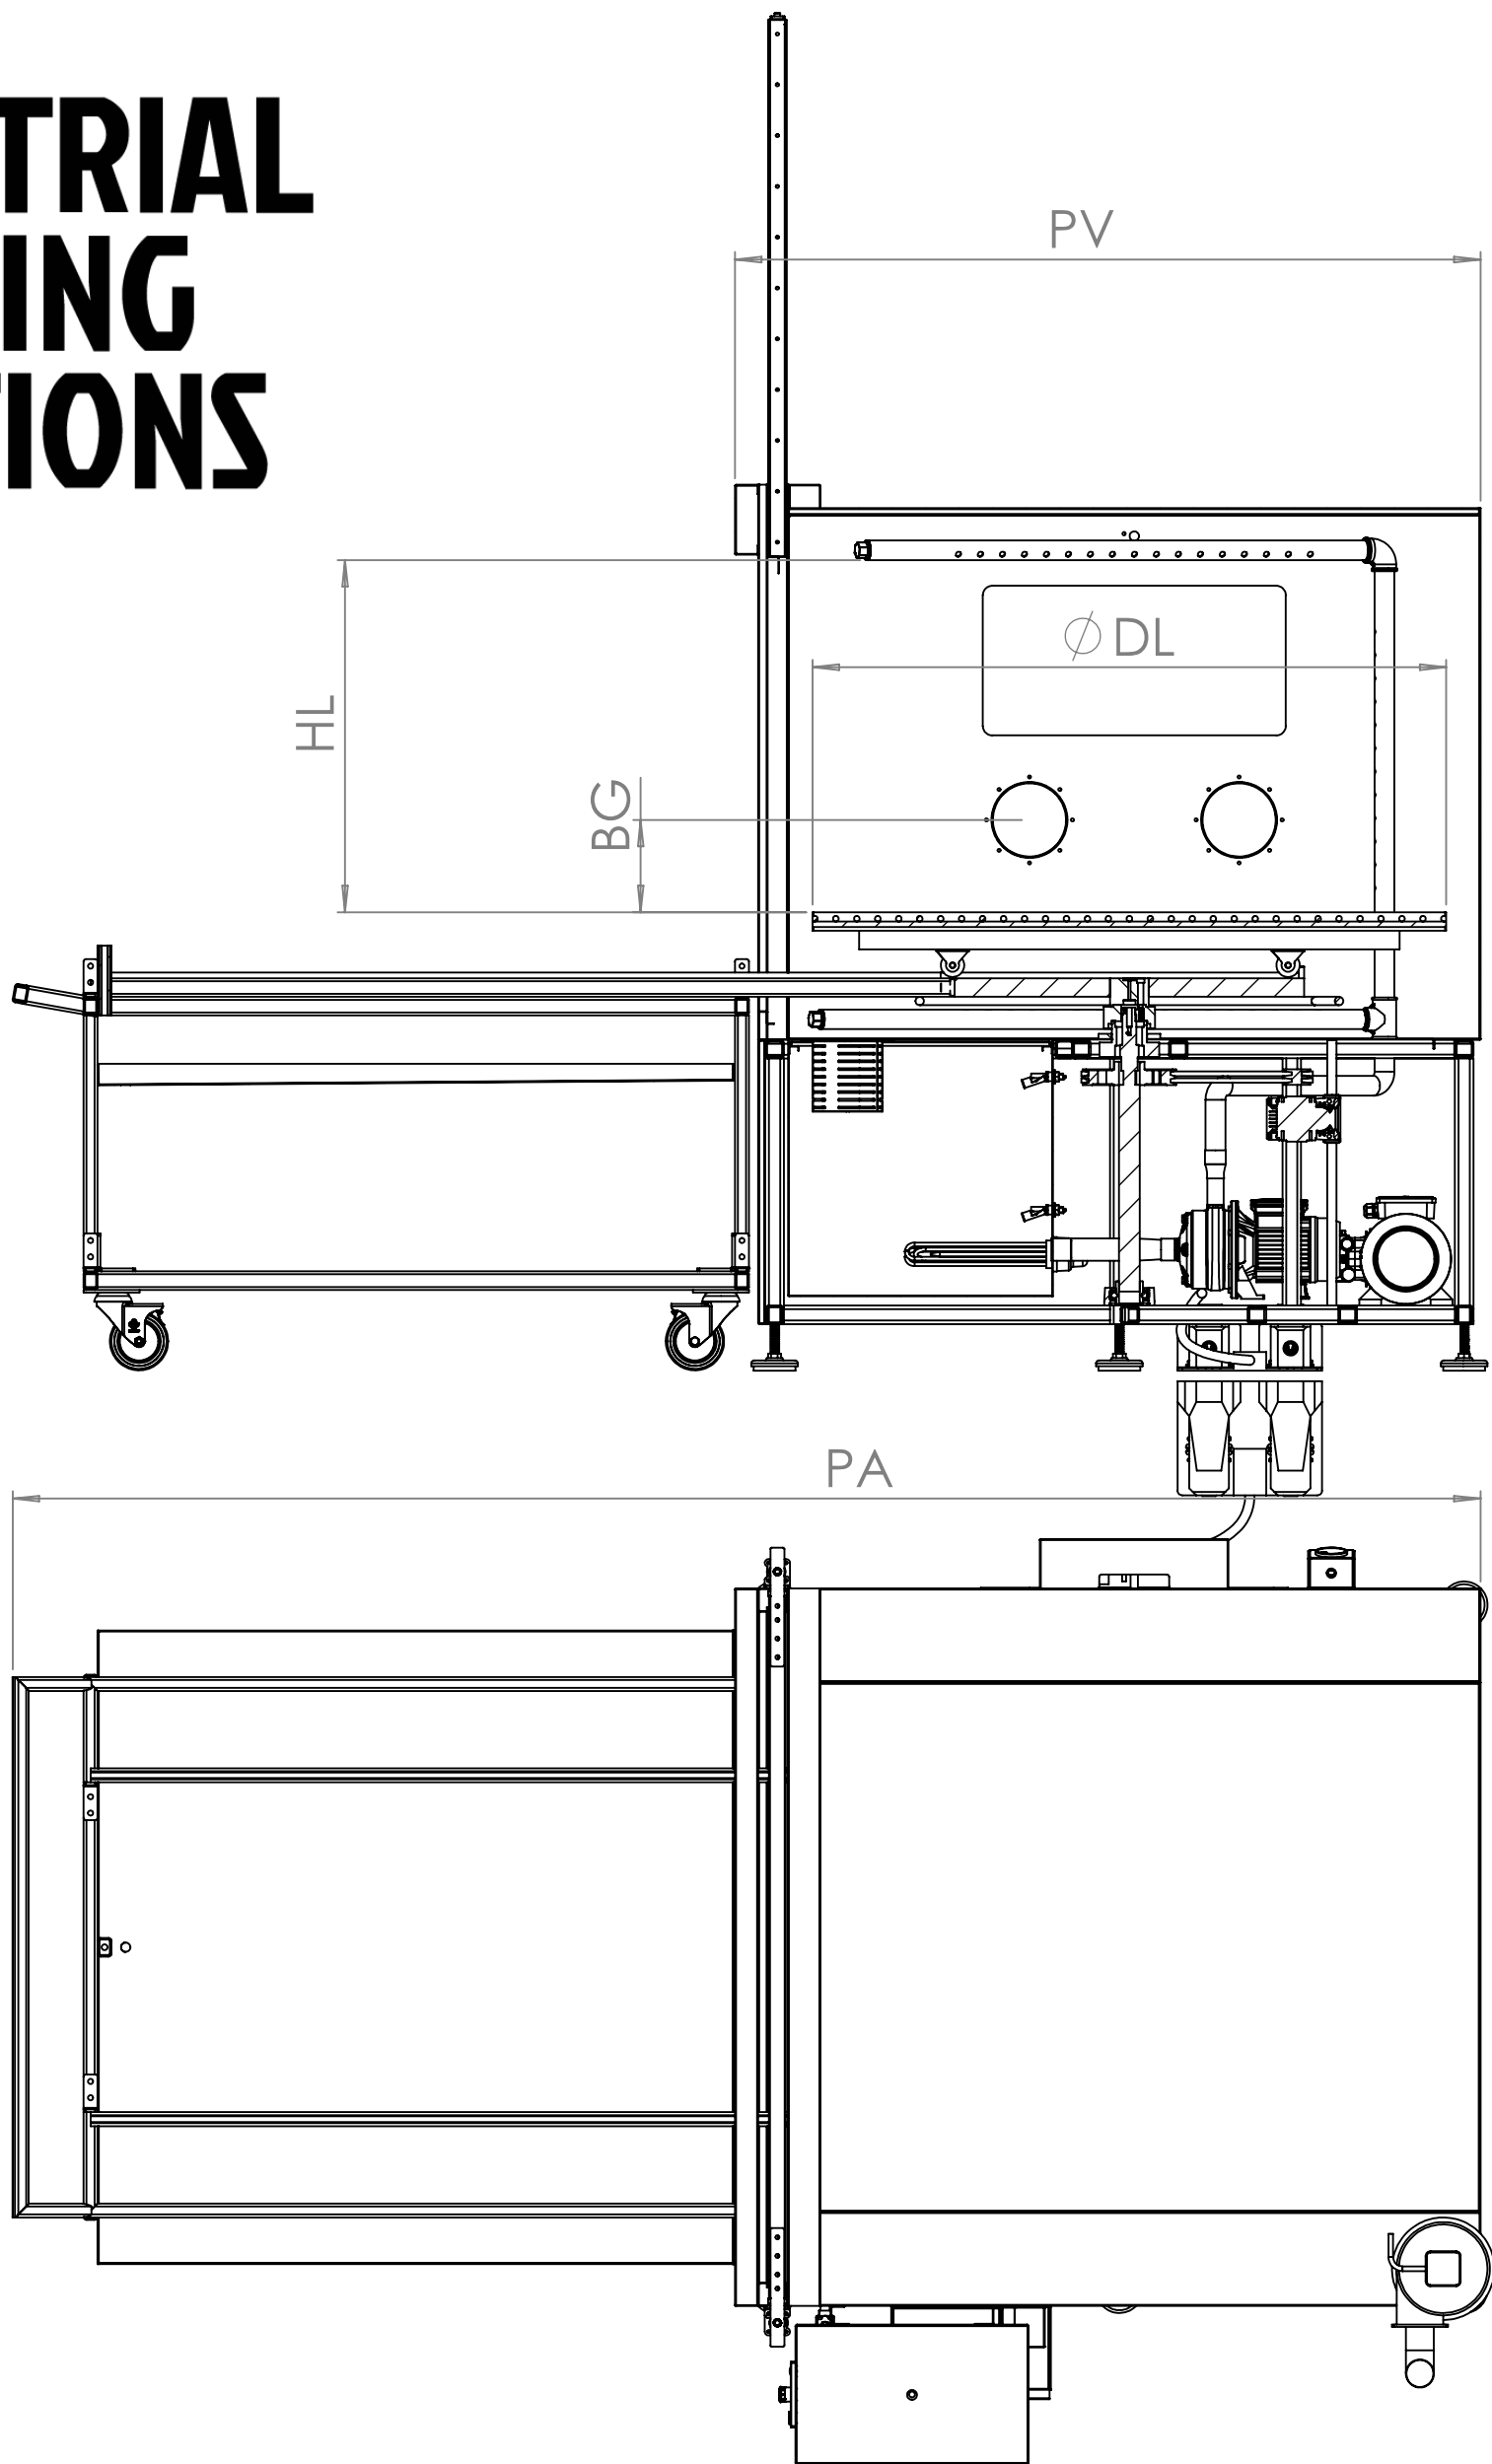
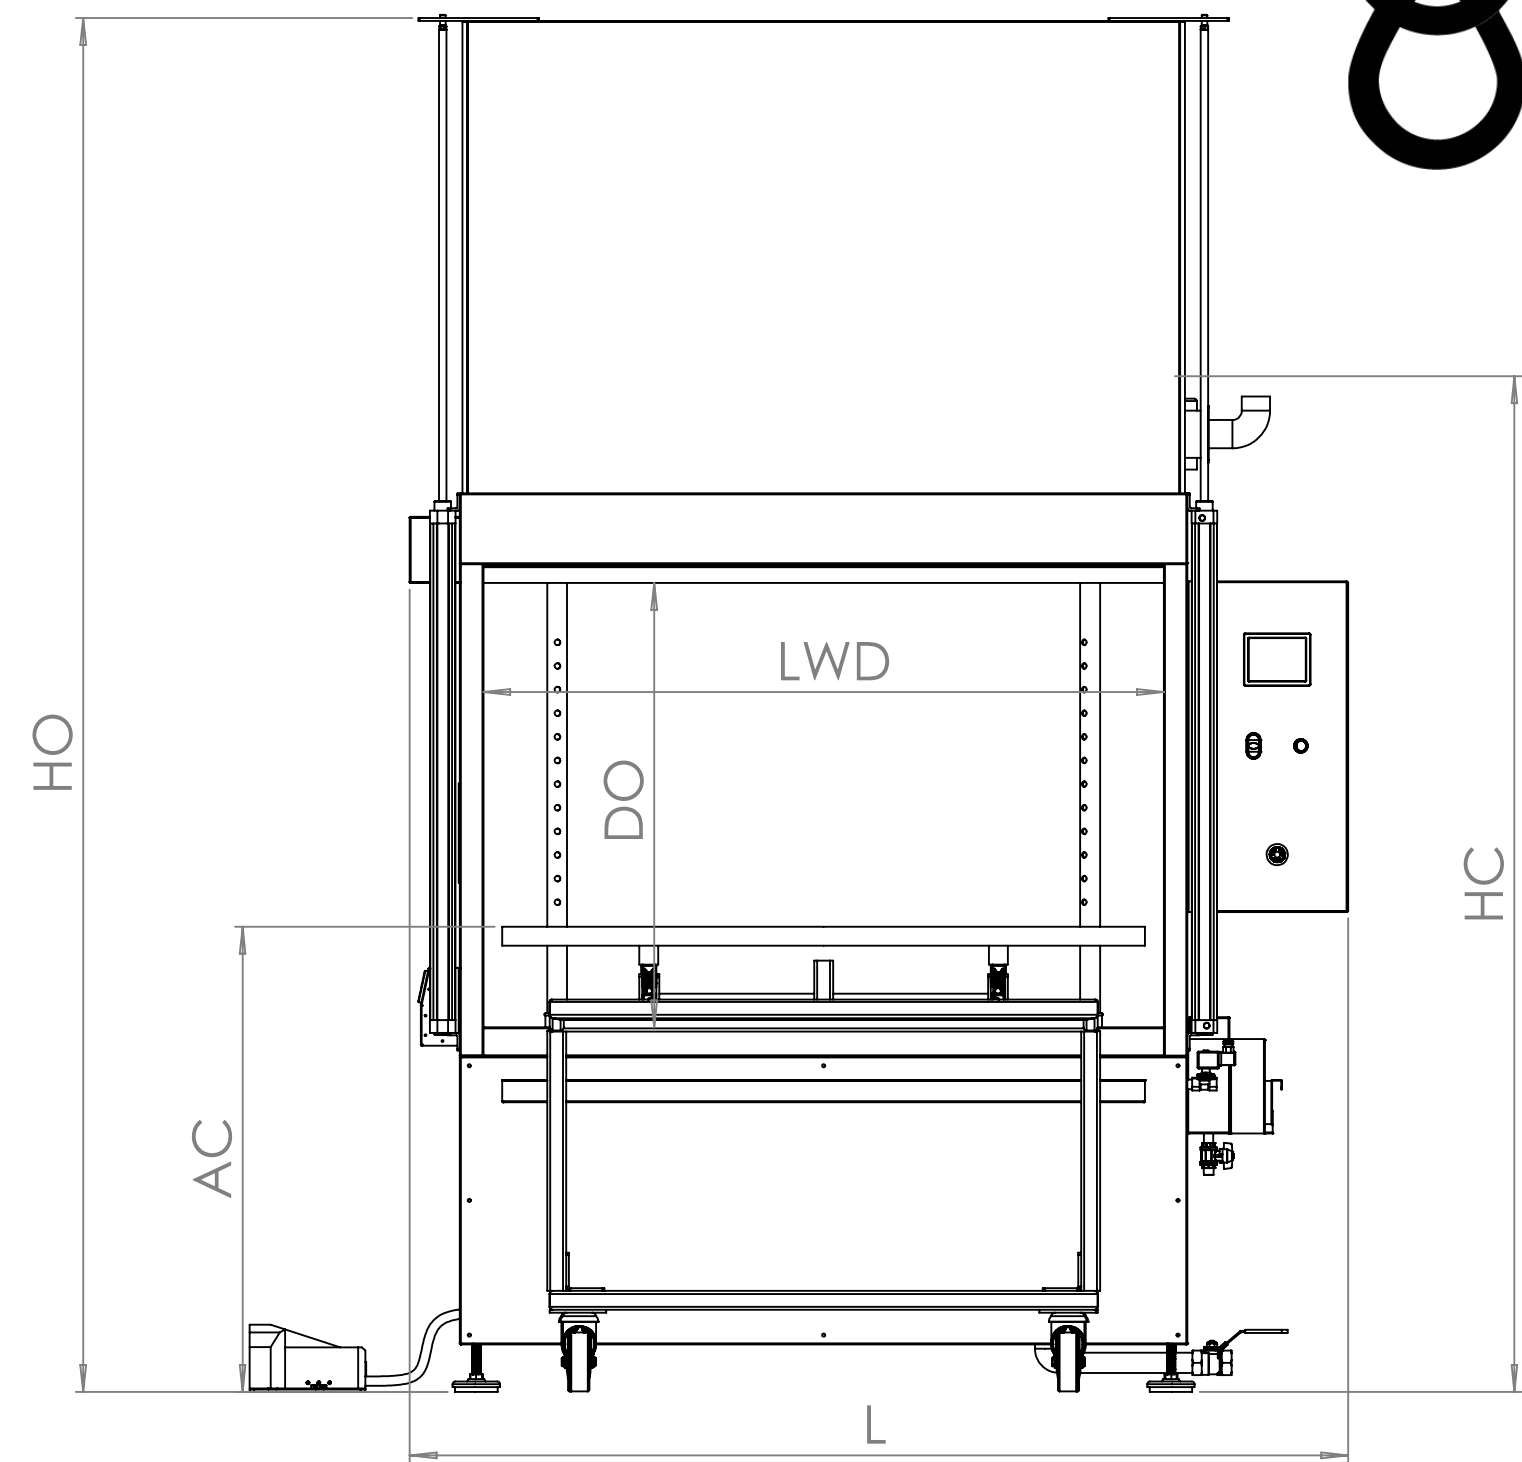
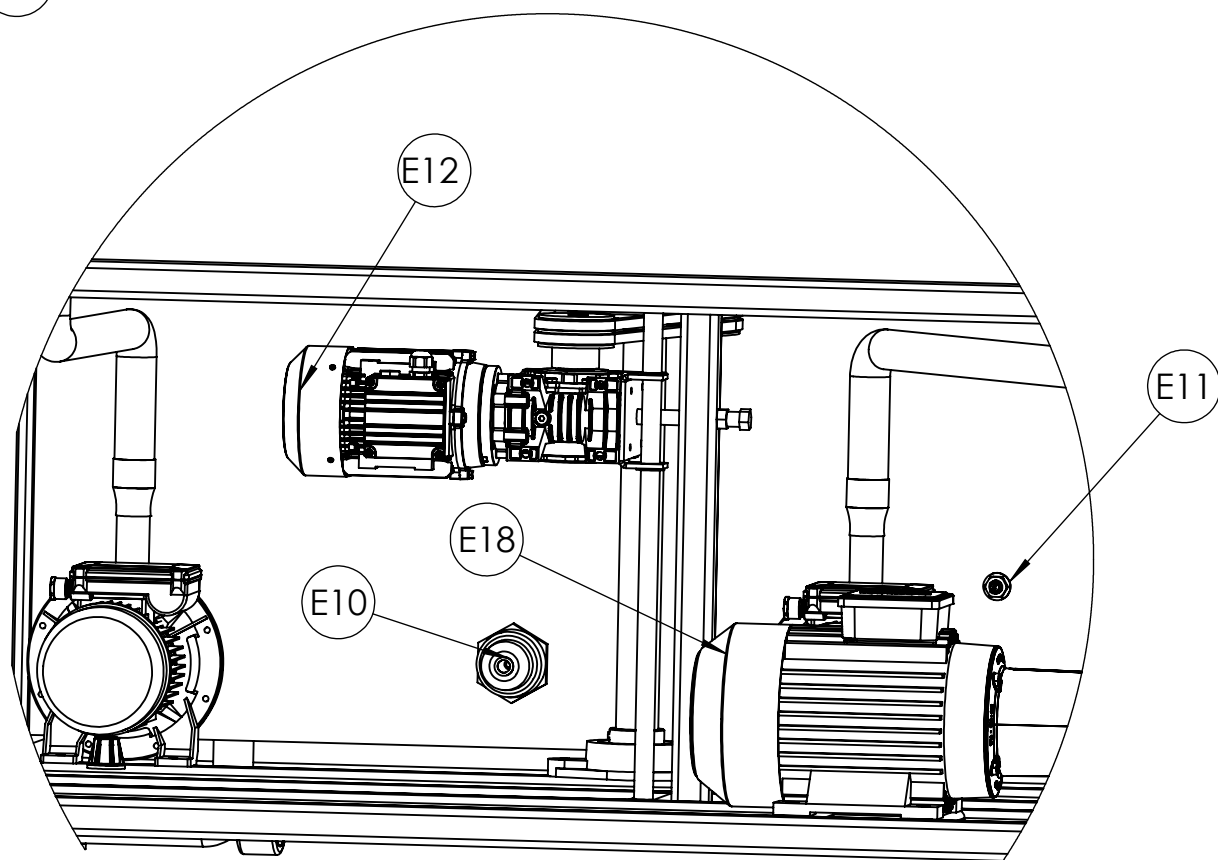




ICS FL MODELS

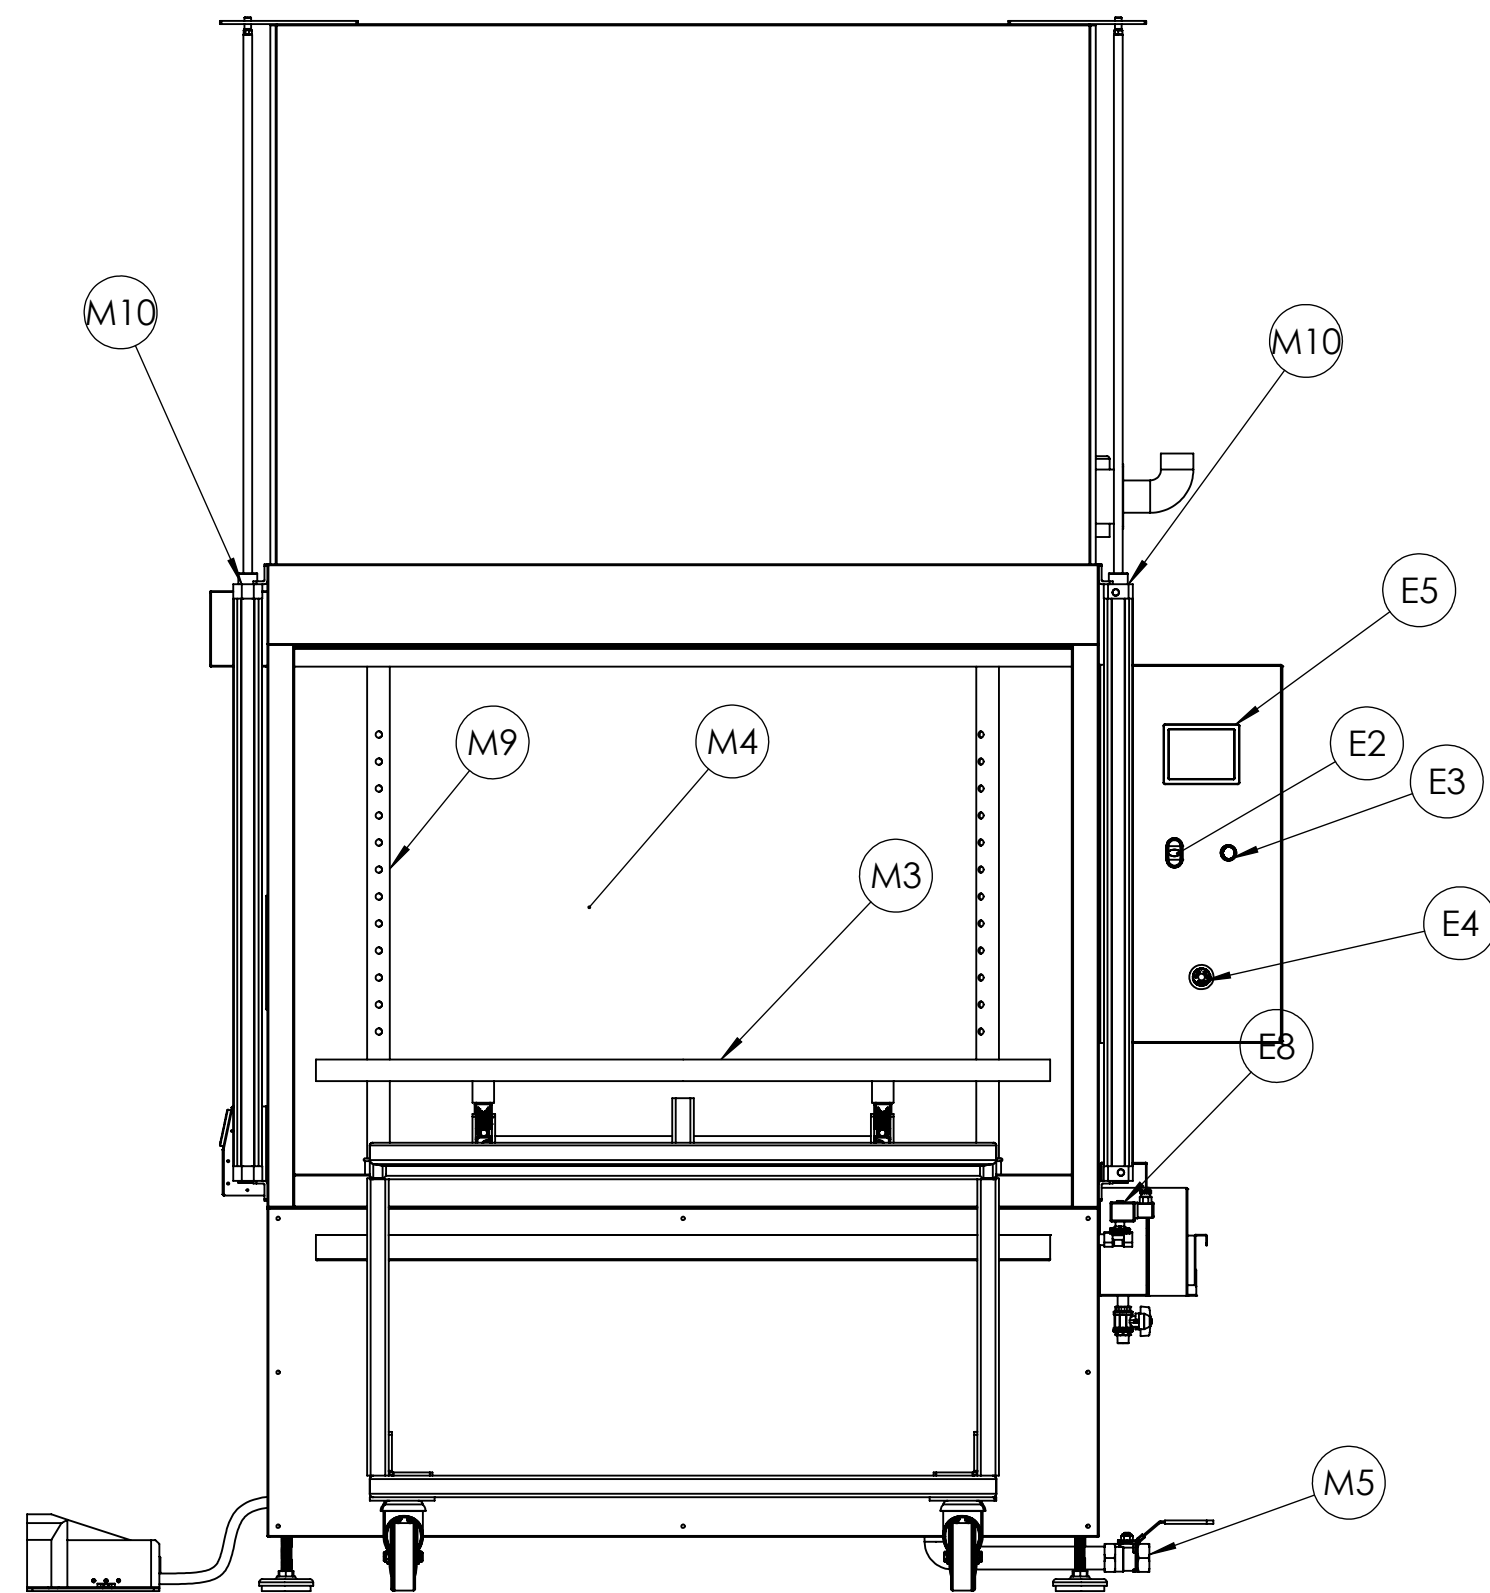


	DIMENSIONS AND LAYOUT	ICS FL1200	ICS FL 1400	ICS FL 1600	ICS FL 1800	ICS FL 2000
L	Length	179 CM	199 CM	219 CM	239 CM	259 CM
PV	Depth	140 CM	160 CM	180 CM	200 CM	220 CM
PA	Depth with loading car	276 CM	316 CM	356 CM	396 CM	436 CM
HO	Opened heigth	290 CM	290 CM	290 CM	320 CM	320 CM
HC	Closed heigth	213 CM	213 CM	213 CM	228 CM	228 CM
LWD	Loading widthness	124 CM	144 CM	164 CM	184 CM	204 CM
DO	Door opening Height	94 CM	94 CM	94 CM	110 CM	110 CM
DL	Washing diameter	116 CM	136 CM	156 CM	176 CM	196 CM
AC	Washing height	98 CM	98 CM	98 CM	98 CM	98 CM
HL	Loading height	75 CM	75 CM	75 CM	90 CM	90 CM
BG	Between the basket and the gloves for goliath models	25 CM	25 CM	25 CM	25 CM	25 CM
TK	Tank capacity	250 LT	350 LT	470 LT	610 LT	770 LT
BM	Basket motor	0.18 KW	0.5 KW	0.5 KW	0.5 KW	0.5 KW
WP	Washing pump	1x 1.2 HP (0.9 KW) - 21 ton/h	2x 1.2 HP (0.9 KW) - 21 ton/h	2x 1.2 HP (0.9 KW) - 21 ton/h	2x 1.2 HP (0.9 KW) - 21 ton/h	3x 1.2 HP (0.9 KW) - 21 ton/h
EF	Exhaust Fan	230V 2400RPM 50HZ 0.085 KW	230V 2400RPM 50HZ 0.085 KW	230V 2400RPM 50HZ 0.085 KW	230V 2400RPM 50HZ 0.085 KW	230V 2400RPM 50HZ 0.085 KW
DS	Disk oil separator	24V - 0.03 KW	24V - 0.03 KW	24V - 0.03 KW	24V - 0.03 KW	24V - 0.03 KW
HP	High pressure washer pump	1x 3 KW(4 HP) - 150 Bar - 11 lt/min	1x 3 KW(4 HP) - 150 Bar - 11 lt/min	1x 3 KW(4 HP) - 150 Bar - 11 lt/min	1x 3 KW(4 HP) - 150 Bar - 11 lt/min	1x 3 KW(4 HP) - 150 Bar - 11 lt/min
GW	Glass wiper	24V - 0.02 KW	24V - 0.02 KW	24V - 0.02 KW	24V - 0.02 KW	24V - 0.02 KW
HE	Heating element	2x7.5 KW	2x7.5 KW	2x7.5 KW	2x10 KW	2x10 KW
WT	Working alimention	400V 3HP 50HZ	400V 3HP 50HZ	400V 3HP 50HZ	400V 3HP 50HZ	400V 3HP 50HZ
AA	Air alimentionation	7 - 8 Bar	7 - 8 Bar	7 - 8 Bar	7 - 8 Bar	7 - 8 Bar
W	Weight	- KG	- KG	- KG	- KG	- KG
RU	Noise LT	- dBA	- dBA	- dBA	- dBA	- dBA

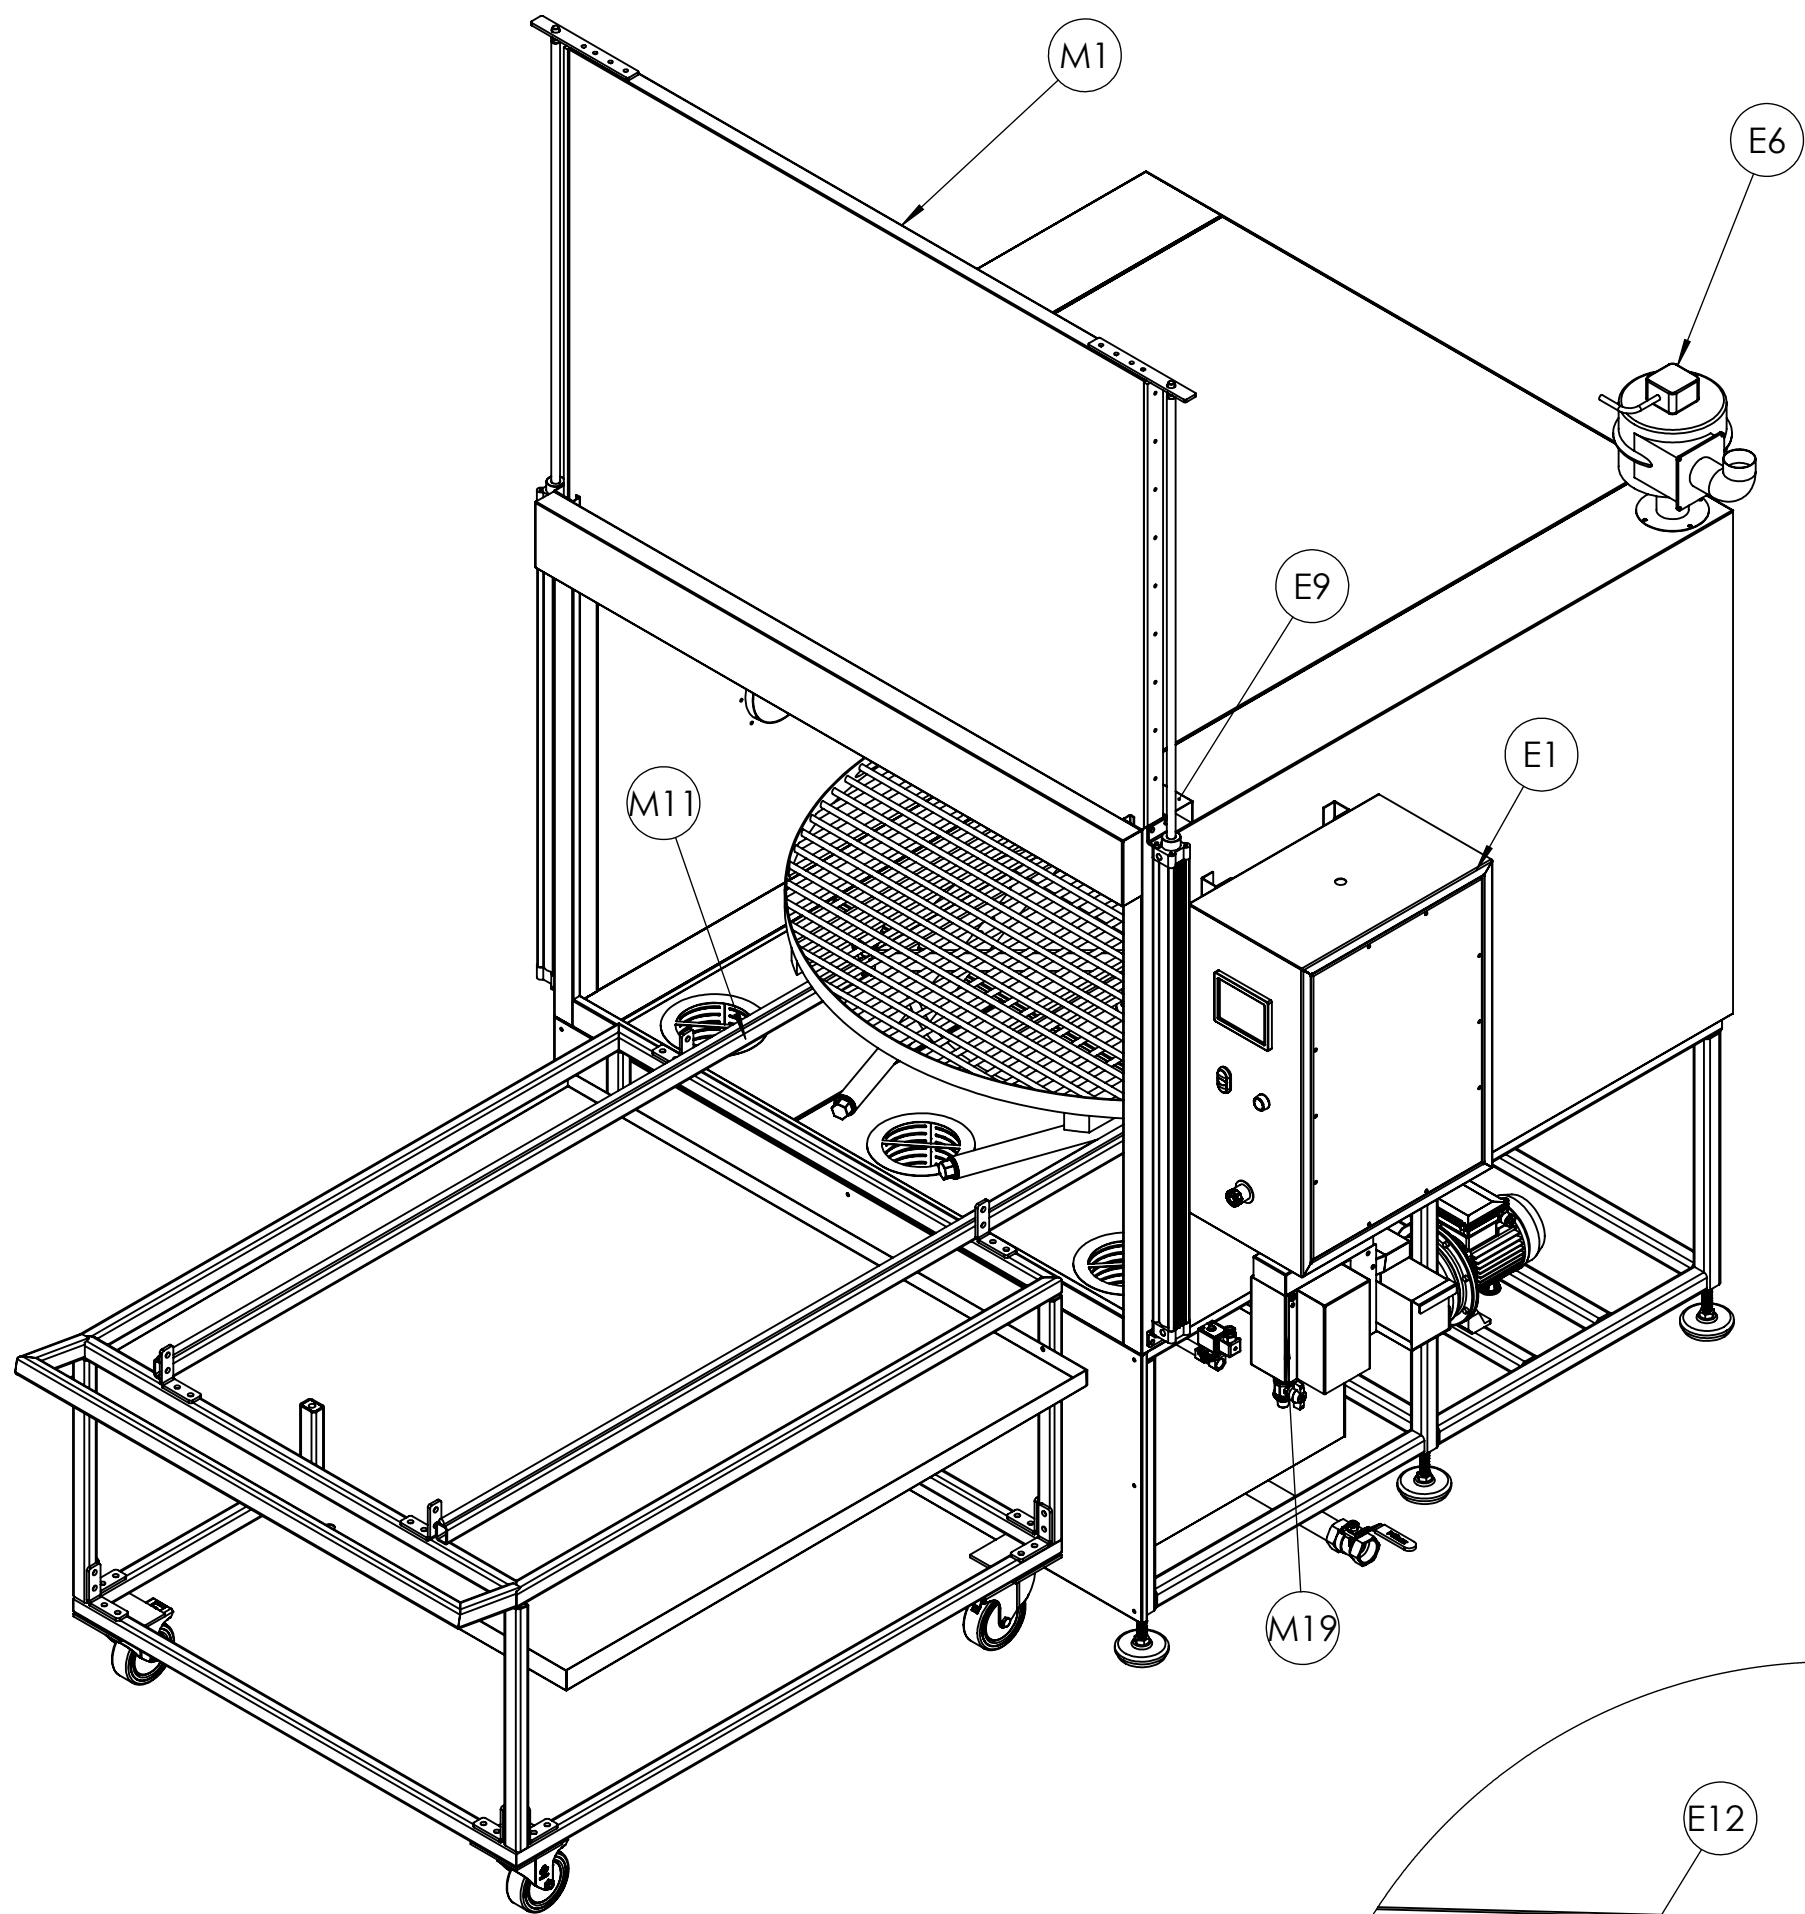

DETAIL B
SCALE 1 : 8

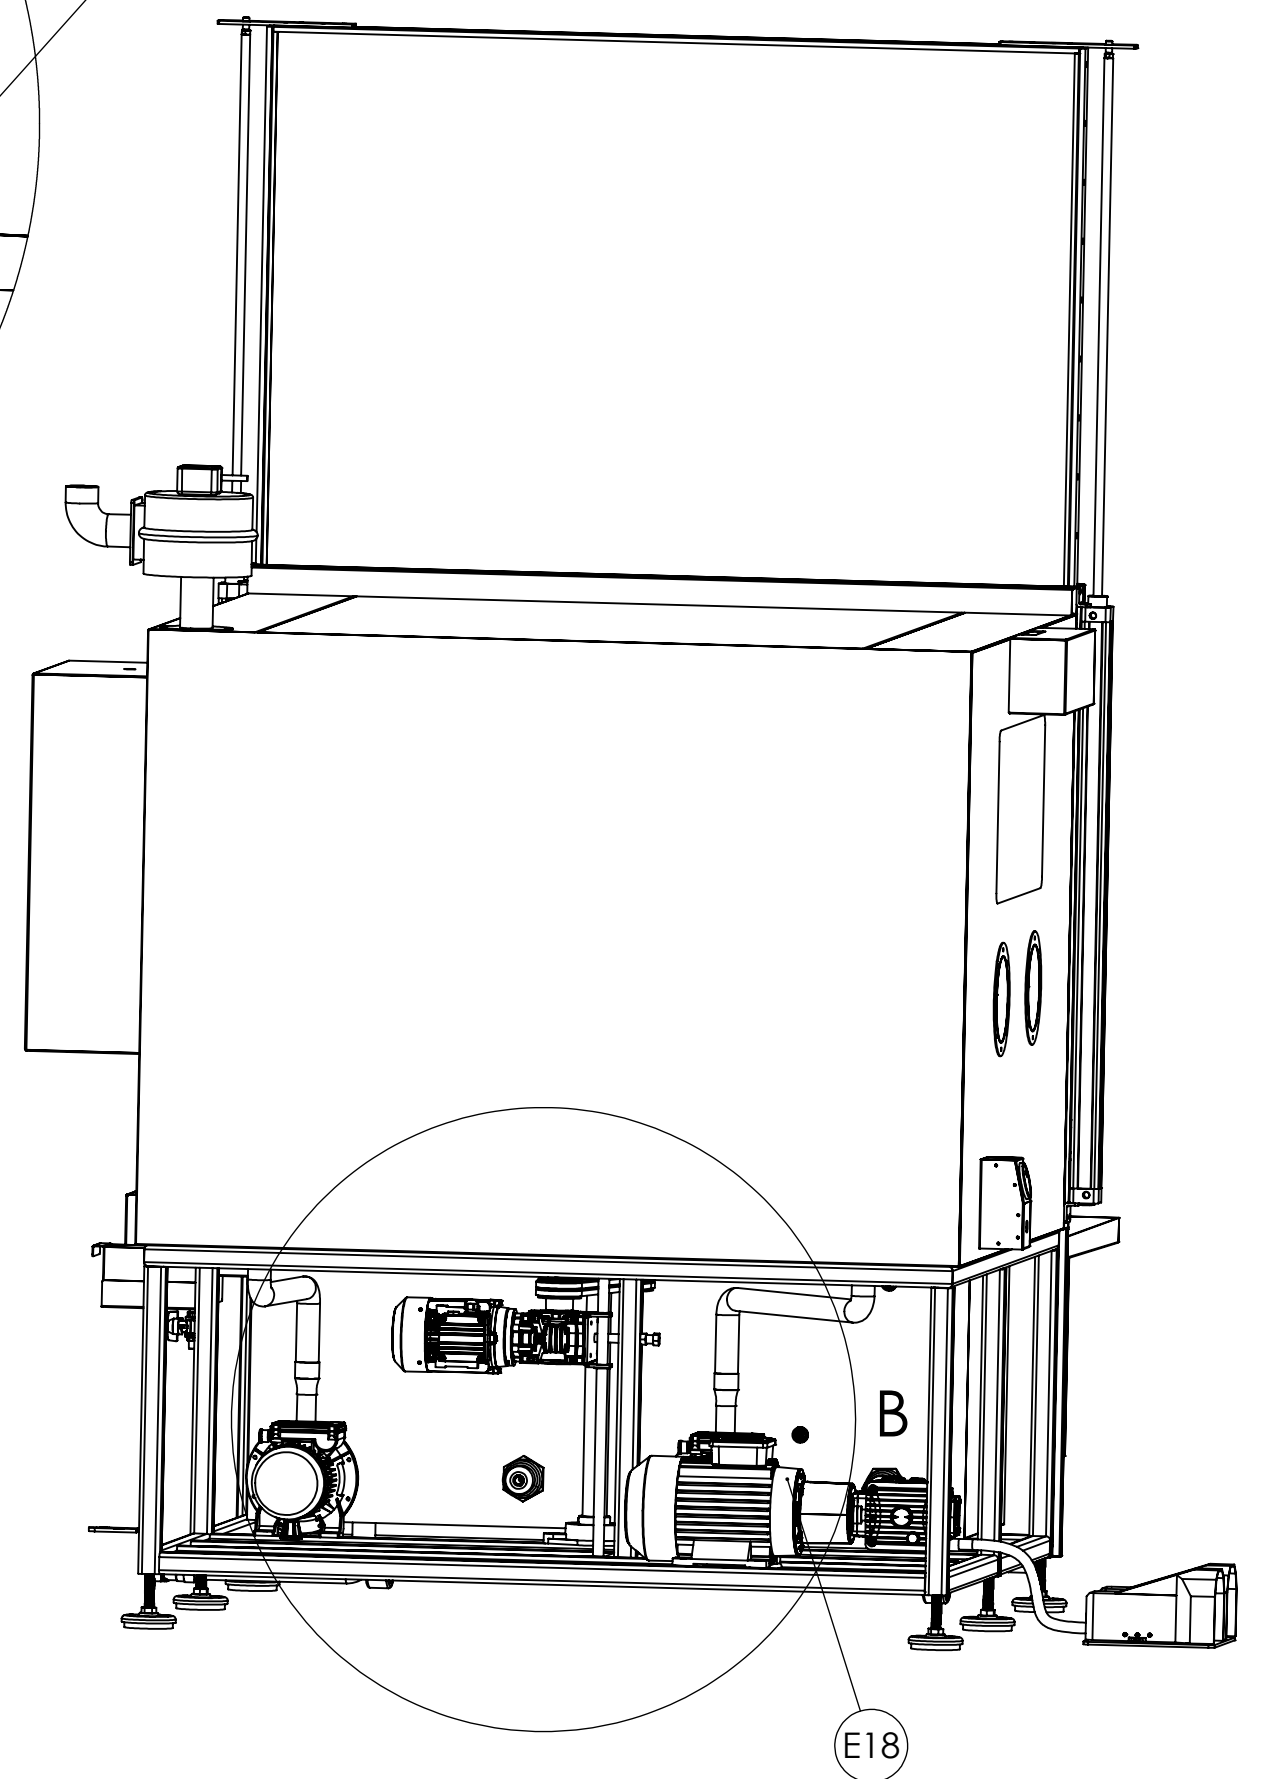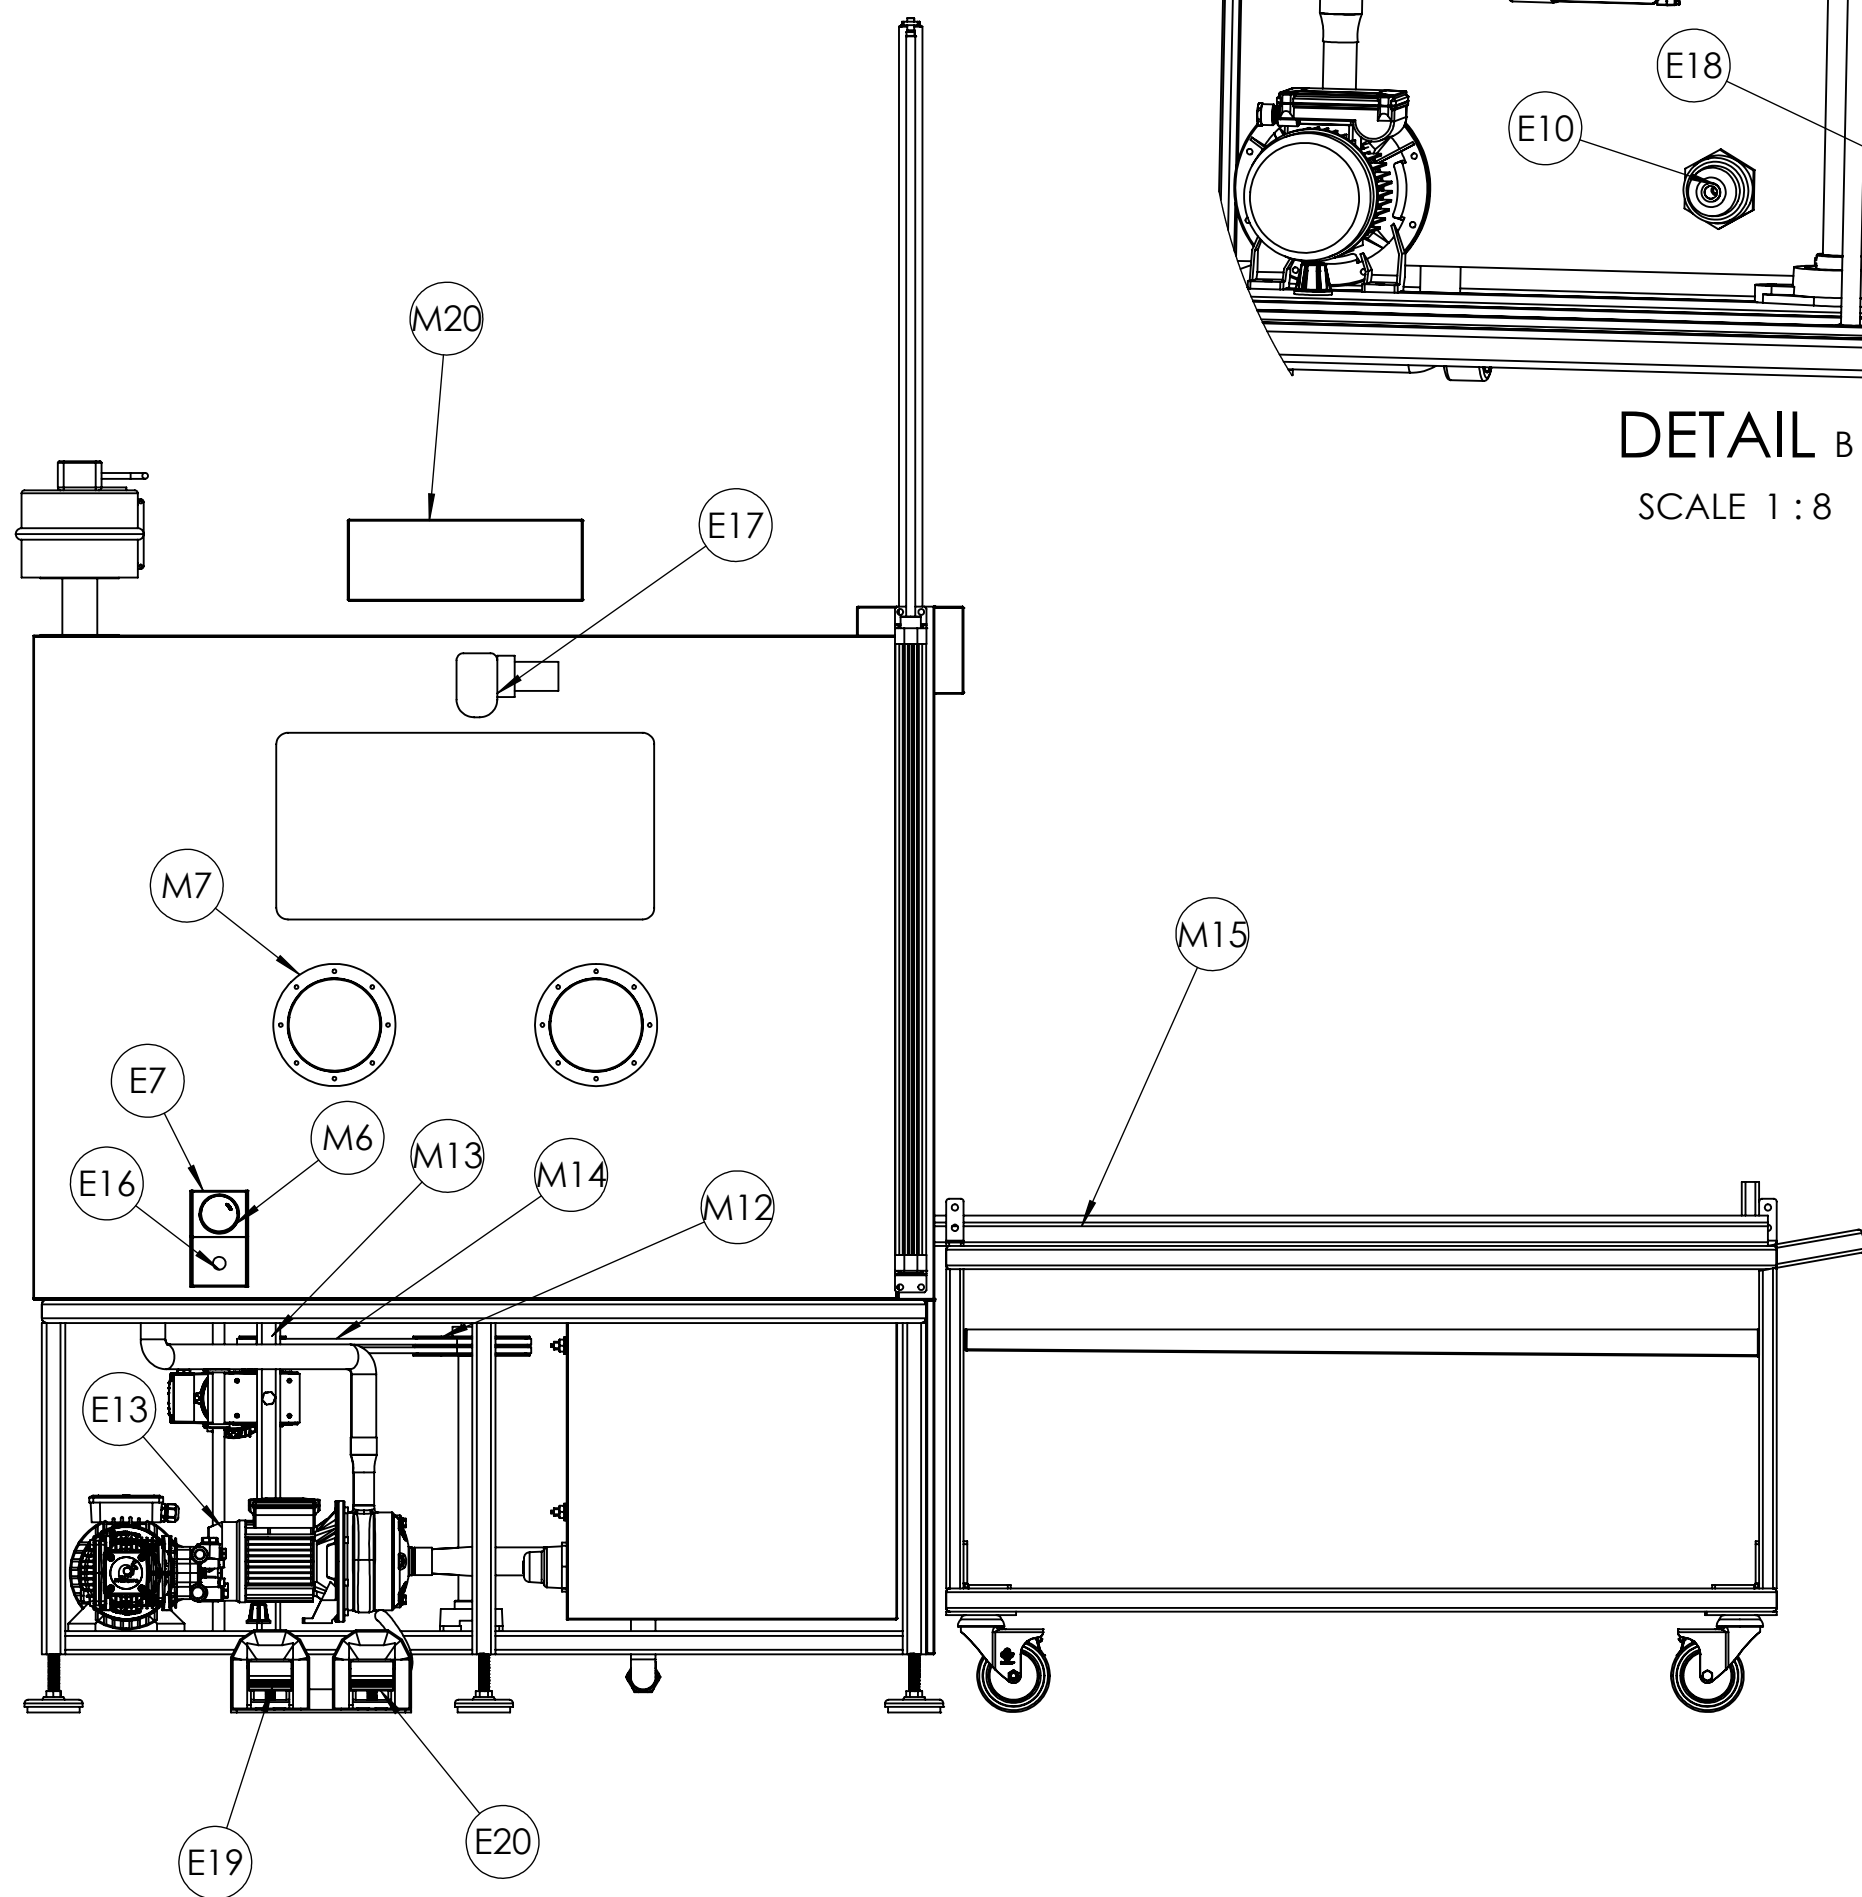

.	PARTS	
M1	Door	
M2	Liquid tank	
M3	Basket	
M4	Working space	
M5	Tank drain valve (1 1/4" BALL VALF)	
M6	High pressure pressure gauge 160 bar	
M7	Heavy duty rubber glove(model H1-60: 580 cm 0.7 mm)	
M8	Hydraulic hose 3/8" 180 bar	
M9	water jet pipe	
M10	40x(1000-1150) mm pneumatic cylinder	
M11	Tank cover filter	
M12	V pulley 17X2X150	
M13	V pulley 17X2X75	
M14	V belt B39,5 17X1000 LI SPB	
M15	Loading car	
M16	Air regulator 1/4" with manometer	
M17	Air filter 1/4"	
M18	Water spray gun	
M19	Oil separator	
M20	Glass wiper cover	
00		
E1	Command box	
E2	Door button	
E3	Basket button	
E4	Emergency stop button	
E5	HMI(human machine interface Delta DOP 107BV)	
E6	Exhaust Fan (BVN Bdras 230 V 2400RPM 50HZ 85W)	
E7	High pressure status indicator lamp	
E8	Solenoid valve 0.5 " 24VDC	
E9	Limit switch	
E10	7.5 - 10 KW heater	
E11	Water float level sensor(elecall EPC6)	
E12	Basket motor(0.18-0.5 KW)	
E13	Atlantis electropomp KAF120T/304 1.2HP 21 ton/h	
E14	PLC DVP-14SS2	
E15	Electropneumatic valf (5/2 M-1/4-53bb220)	
E16	High pressure pressure start button	
E17	Glass wiper motor (SGR 56114) 0.02 KW	
E18	SUTEM PUMP MAX (80 - 150) BAR 1450 RPM (4 KW) 4HP	
E19	High pressure start electric foot pedal	
E20	Basket start electric foot pedal	
0		

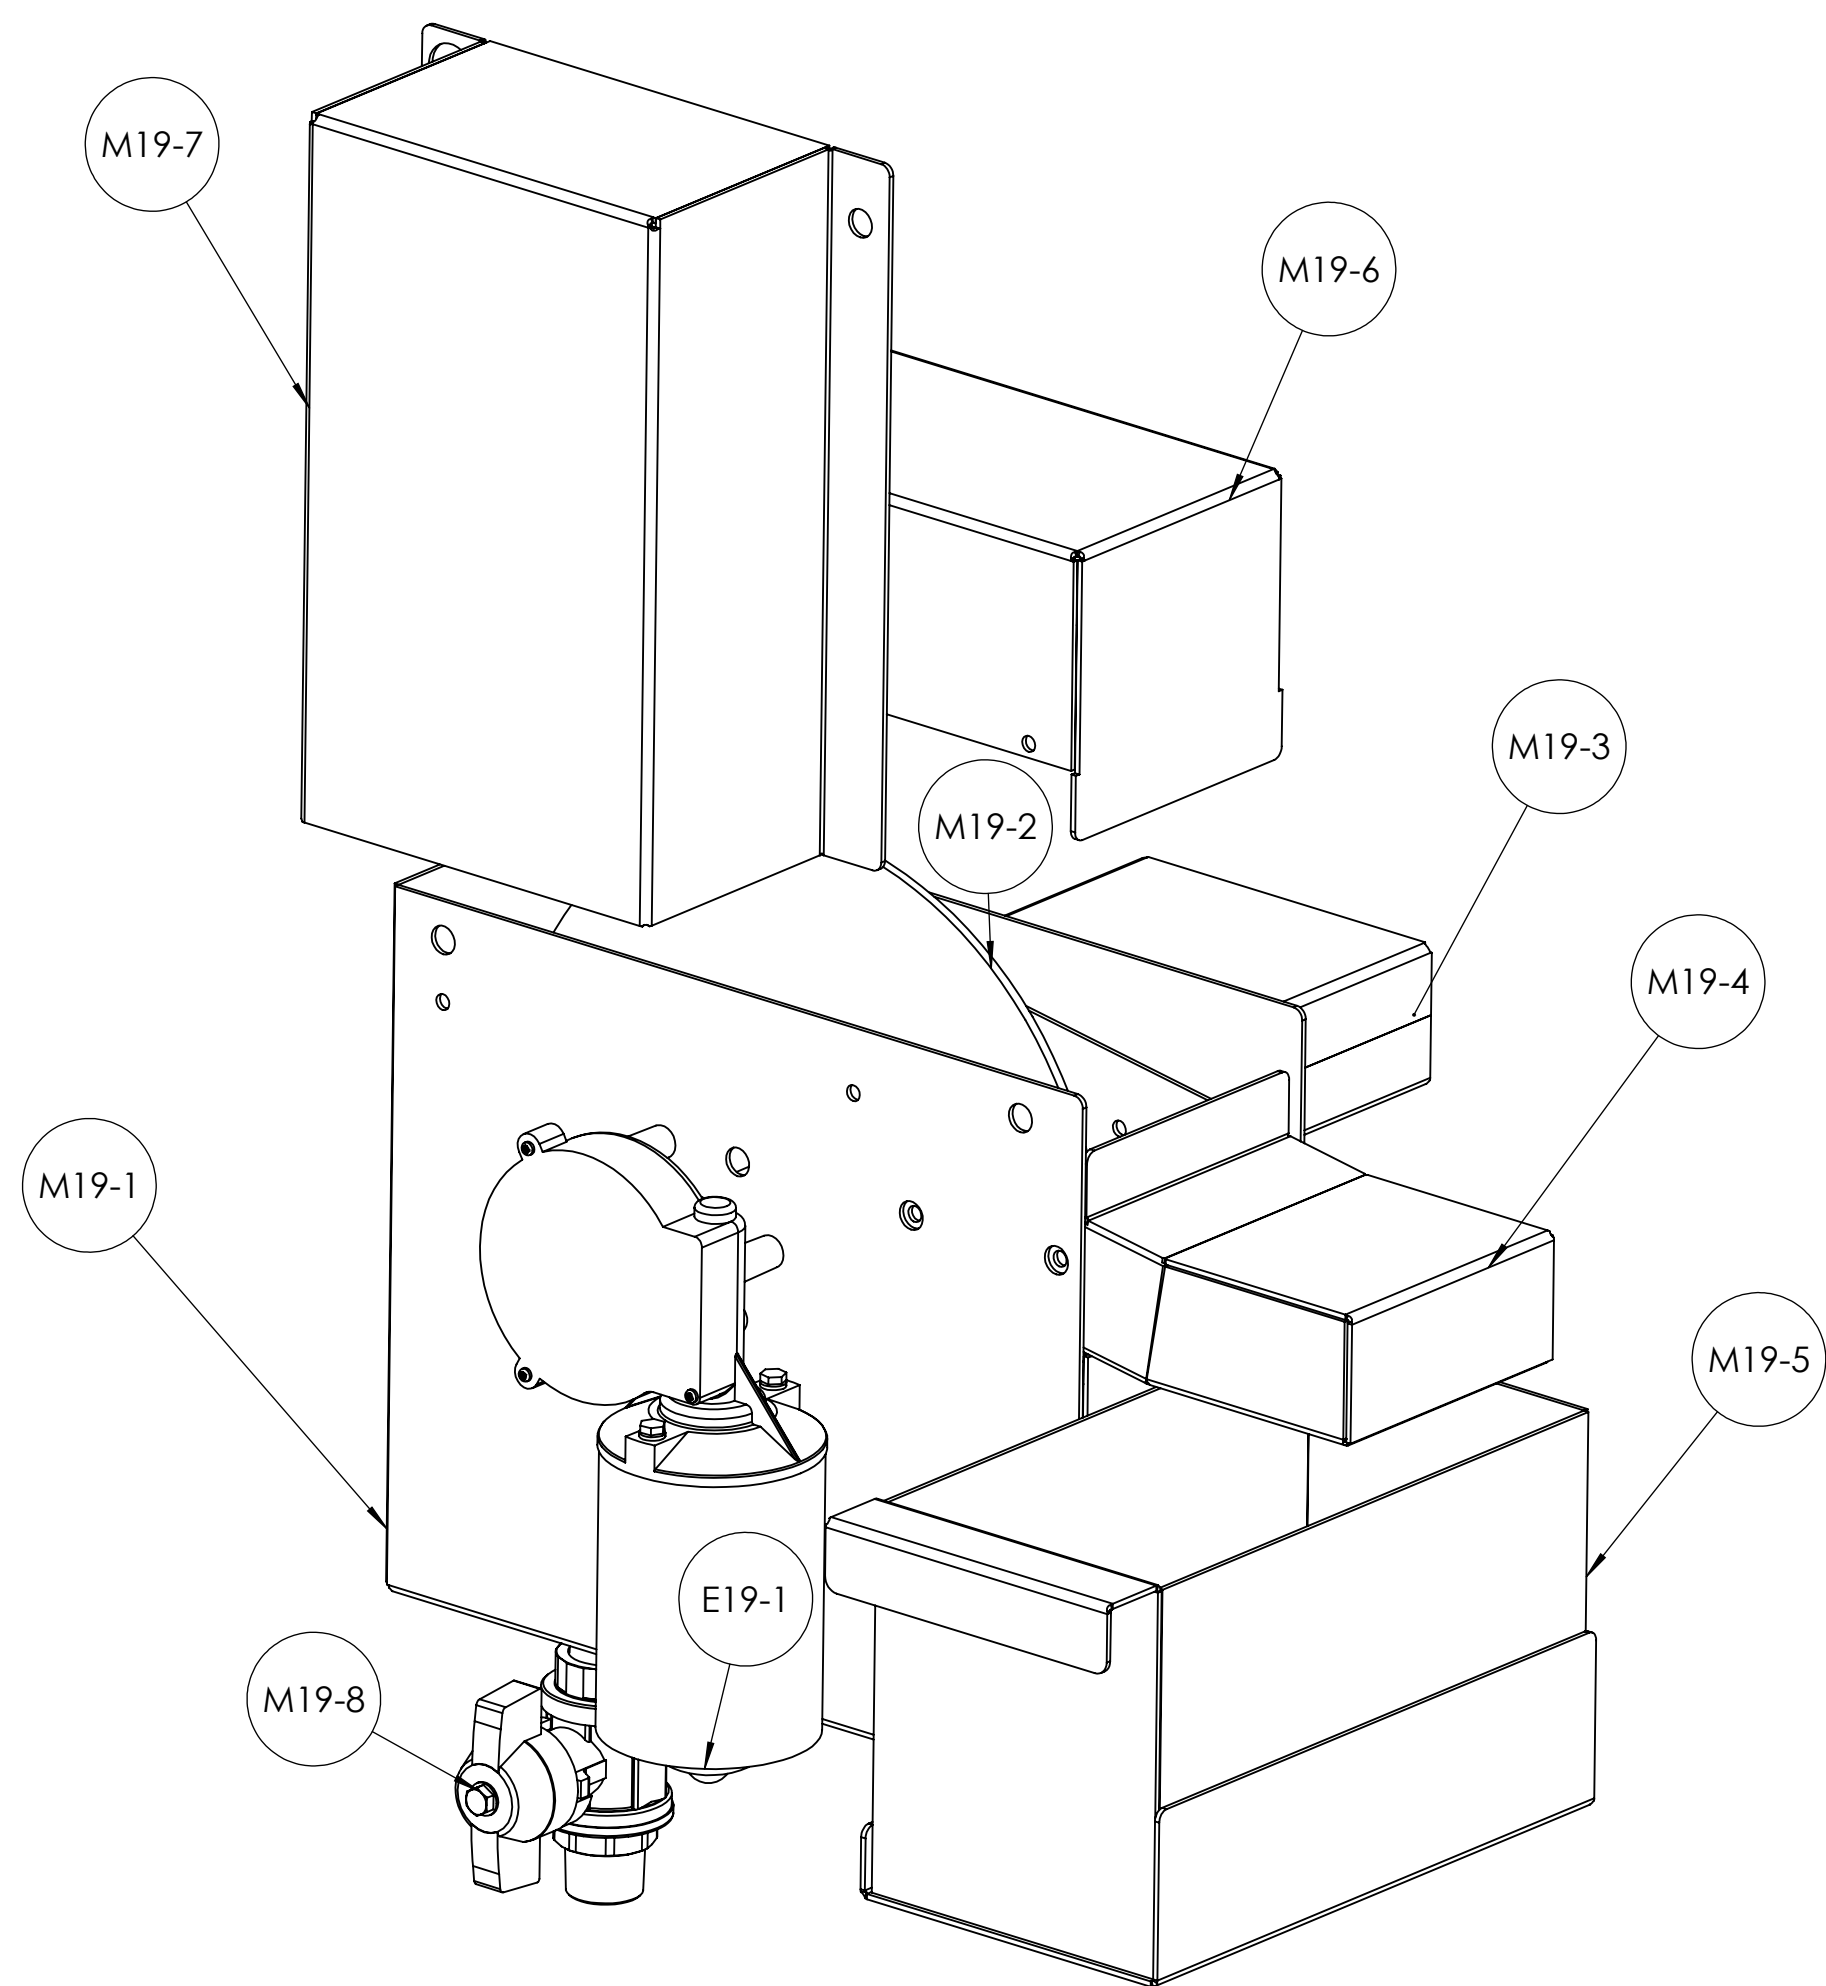

.	M19 PARTS	
M19-1	Oil separator body	
M19-2	Oil separator disc	
M19-3	Oil separator alimentation channel	
M19-4	Oil separator waste orientator	
M19-5	Oil ve dirt collector box	
M19-6	Oil separator body cover	
M19-7	Oil separator motor cover	
M19-8	collector box drain valve 1/2"	
00		
E19-1	Oil separator motor (SGR 56112) 0.03 KW	
0		